


Cleerline SSF™ Fan Out Kits enable fast and easy build-up of 250 μm fibers found in today's common micro distribution style cables. The kit's 900 μm color-coded buffer tubes allow the cable's overall jacket to be removed and each 250 μm fiber to simply be threaded through the corresponding colored tube. To complete, the assembly snaps together and requires no additional tooling or epoxy.

Using a fan out kit provides additional protection to 250 μm fibers that might be installed in a pass-through plate or equipment rack, or other exposed location.

Loose tube fanout kits are available in 4, 6, and 12 strand configurations and in two different lengths. These kits work with all 250 μm type single mode or multimode cabling and industry standard connectors.

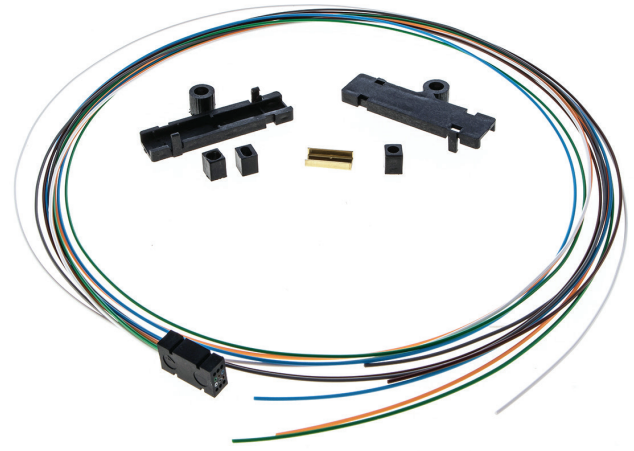

FEATURES AND BENEFITS

- 4, 6, and 12 strand configurations
- Two different lengths available
- Tubing colored per TIA/EIA-569-B standard
- Provides protection to any installation
- Easy to assemble, simple snap housing

SPECIFICATIONS

- TIA/EIA-568-B compliant
- ABS Plastic
- Hytrel furcation tubing
- 900 μm outer diameter

APPLICATIONS

- Premise/Enterprise Networks
- Backbone, Horizontal, and FTTx applications
- Data Center, Enterprise, Broadcast, Industrial
- Defense, Healthcare, and Telco/MSO
- Field repair/replacement
- LAN/WAN connections

PART NUMBER	DESCRIPTION	O.D.	LENGTH
FAN0425M250	4 Strand	900 μm	25 in / 63.5 cm
FAN0436M250	4 Strand	900 μm	36 in / 91.4 cm
FAN0625M250	6 Strand	900 μm	25 in / 63.5 cm
FAN0636M250	6 Strand	900 μm	36 in / 91.4 cm
FAN1225M250	12 Strand	900 μm	25 in / 63.5 cm
FAN1236M250	12 Strand	900 μm	36 in / 91.4 cm