

# 9/125 SSF™ Single Mode OS2, 3.0 mm Jacketed Duplex Riser / Plenum I/O / LSZH Cable


Type: OS2, OFNP, OFNR, LSZH, Product Type G.657.A2, G657.B2, G.652.D



Cleerline SSF™ Duplex cable is composed of two strands of SSF™ cable in zipcord style with an overall 3.0 mm Riser, Plenum, or LSZH jacket.

SSF™ Duplex is ideal for inter-building or intra-building data communication backbones. The cable's zipcord construction allows easy separation of the fiber strands if desired.

Cleerline SSF™ Duplex Single Mode cable is fully compatible with all common connector systems for standard 9/125 single mode fibers. The included SSF™ fibers provide extreme durability and strength, with up to 10,000 times the bend insensitivity of traditional fiber.

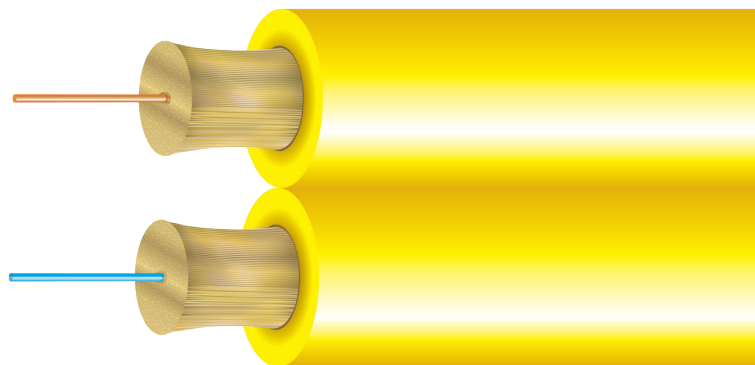


3D VIEW

## FEATURES AND BENEFITS

- Zipcord construction - easy to separate strands
- High mechanical strength, superior fatigue (nD = 30)
- Compatible with common connector systems for 9/125 single mode fibers
- Up to 10,000x the bend longevity of traditional fiber
- Integral SSF™ coating provides glass protection
- Increased safety due to incredible bend insensitivity
- Exclusive 250 µm Soft Peel acrylate

## APPLICATIONS

- Inter-/Intra-building voice or data communication
- Installation in ducts or underground conduit
- Fiber-to-the-desk (FTTD) / Fiber-to-the-Home (FTTH)
- ETL listed type OFNP for installation in ducts, plenums and other spaces used as environmental air returns when installed in accordance with NEC article 770-51 (a) and 770-53(a)

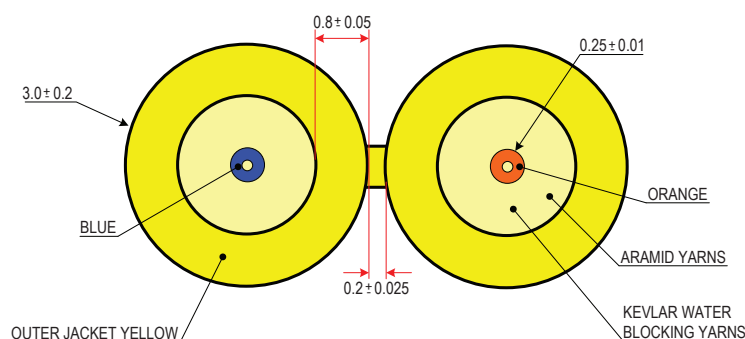

TYPICAL CROSS SECTION

PART NUMBER	FIBERS	DESCRIPTION	TYPE RISER/PLENUM/LSZH	O.D.	WEIGHT (LB / 1000 FT)
D29125SMOSX	2 Fibers	Duplex 9/125 SSF - 1000 ft Spool	X= R/P/L	3.0 mm x 2	13.2
D29125SMOSX-B	2 Fibers	Duplex 9/125 SSF - Cut to Order	X= R/P/L	3.0 mm x 2	13.2

## CONSTRUCTION

FIBER	
Fibers	2
Type	9/125 Single Mode OS2
Coating	250 µm "Soft Peel" S-Type Coating (1 = Blue, 2 = Orange)
Color Coding	Per TIA/EIA 568C

JACKET	
Type	Riser Rated PVC (Indoor) Plenum Rated PVC + UV I/O / LSZH (Indoor/Outdoor)
Color	Yellow
Outer Diameter	3.0 mm x 2 (6.2 mm)
Markings	Sequential Foot Markings
Strength Member	Kevlar (Plenum + water blocking yarns)

## CLEERLINE TECHNOLOGY GROUP, LLC

8404 El Way Drive #2B, Missoula, MT 59808 USA & CAN: 866-469-2487 Fax 406.532.0060  
Web: www.cleerlinefiber.com Copyright 2012 Cleerline Technology Group, LLC.

Date: 3/4/2019 Rev. 1.7

Int'l +1.406.541.9830 Int'l Fax 1.406.532.0060  
All rights reserved. Subject to change without notice.

### PHYSICAL DATA

Storage Temperature Range	-40°C to +85°C
Operating Temperature Range	-20°C to +75°C
Max Tensile Load (Installation)	1000 N (225 lbf)
Max Tensile Load Long Term	500 N (112 lbf)
Min. Bend Radius, Unloaded	1 x O.D.
Cable Outside Diameter, Nominal	3.0 mm x 2
Cable Package	1000 ft Reel or customer request, spooled
Rating	FT4 - Riser / FT6-Plenum / LSZH
Crush Resistance (TIA/EIA 455-41A)	100 kgf / mm
Impact Resistance (TIA/EIA 455-25B)	1500 impact cycles
Flexing @ 90 degrees (TIA/EIA 455-104A)	2000 flexing cycles

### ENVIRONMENTAL CHARACTERISTICS

Temperature Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation	-60°C to + 85°C
Watersoak Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 20°C for 30 days	
Damp Heat Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 85°C, 85% R.H., 30 days	
Dry Heat Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 85°C, 30 days	

### COMPLIANCE

ETL Listed Type OFNR, CSA FT4, IECA S-83-596 & OFNP, CSA FT6 / IECA S-104-696, GR-409.  
 LSZH Listed CPR Cca-s1a, d1, a1.  
 DoP Available on Request.  
 RoHS Compliant Directive 2011/65/EU



### PHYSICAL CHARACTERISTICS

Core / Hybrid Cladding Concentricity Error	≤ 0.5 μm	
Hybrid Cladding Diameter	125 ± 0.7 μm	
Hybrid Cladding Non-Circularity Error	≤ 1.0%	
Soft Peel Jacket Identifier	250 ± 0.7 μm	
Coating Strip Force	100 g	
Fiber Curl	≥ 2 m	
Proof Test	100 kpsi	
Dynamic Fatigue 23°C, 41% R.H.	> 30 nD	
Bend Induced Attenuation, 1550 nm	1 turn around 10 mm radius	≤ 0.3 dB
	10 turns around 15 mm radius mandrel	≤ 0.03 dB
Bend Induced Attenuation, 1625 nm	1 turn around 10 mm radius	≤ 1.0 dB
	10 turns around 15 mm radius mandrel	≤ 0.2 dB

### OPTICAL CHARACTERISTICS

Attenuation Coefficient	1310 nm	≤ 0.35 dB/km
	1550 nm	≤ 0.21 dB/km
Mode Field Diameter	1310 nm	8.6 ± 0.4 μm
	1550 nm	9.7 ± 0.5 μm
Cable Cut-off Wavelength	≤ 1260 nm	
Zero Dispersion Wavelength	1310 nm - 1324 nm	
Zero Dispersion Slope	0.092 ps / nm <sup>2</sup> · km	

### BACKSCATTER CHARACTERISTICS

Attenuation Directional Uniformity	≤ 0.03 dB/km	
Attenuation Uniformity	≤ 0.05 dB/km	
Group Index of Refraction	1310 nm	1.467
	1550 nm	1.468